

Hydrophone TC4033

Robust Spherical Reference Hydrophone



The TC4033 provides uniform omnidirectional characteristics within the full frequency range of 1Hz to 140kHz.

The typical sensitivity of -203dB re 1V/μPa and the capacitance of 7nF ensure an excellent signal to noise ratio, thereby allowing TC4033 to be used with extension cables with only a limited reduction in sensitivity.

The TC4033 offers excellent acoustic characteristics and durability, which makes it ideal for a wide range of applications and for calibration purposes.

NBR means Nitrile Rubber

The NBR rubber is first of all resistant to sea and fresh water but also resistant to oil. It is limited resistant to petrol, limited resistant to most acids and will be destroyed by base, strong acids, halogenated hydrocarbons (carbon tetrachloride, trichloroethylene), nitro hydrocarbons (nitrobenzene, aniline), phosphate ester hydraulic fluids, Ketones (MEK, acetone), Ozone and automotive brake fluid.

TECHNICAL SPECIFICATIONS

Usable frequency range:	1Hz to 140kHz
Linear frequency range:	1Hz to 80kHz
Receiving sensitivity:	-203dB ±2dB re 1V/μPa at 250Hz
Transmitting sensitivity:	144dB ±2dB re 1μPa/V at 1m at 100kHz
Horizontal directivity:	Omnidirectional ±2dB at 100kHz
Vertical directivity:	270°±2dB at 100kHz
Nominal capacitance:	7.8 nF (incl.10m cable)
Operating depth:	900m
Operating temperature range:	-2°C to +80°C
Storage temperature range:	-40°C to +80°C
Weight, incl. 10m cable (in air):	1.5kg
Cable (length and type):	Standard 10m shielded pair DSS-2/MIL-C-915. Optional cable length available on request
Connector type:	BNC
Encapsulating material:	Special formulated NBR
Metal body:	Aluminum bronze - AlCu10Ni5Fe4



PRODUCT BENEFITS

- Omnidirectional in the full frequency range
- Wide frequency range
- Durable construction
- Long-term stability
- Individually calibrated



TELEDYNE MARINE
RESON
 Everywheryoulook™


Hydrophone TC4033

Robust Spherical Reference Hydrophone


Documentation:

Individual calibration curves:	Sensitivity at reference frequencies: 250kHz	Receiving sensitivity: 5kHz to 200kHz	Impedance: 5kHz to 200kHz
Horizontal directivity: At 100kHz	Vertical directivity: At 100kHz	Transmitting sensitivity: 5kHz to 200kHz	


Horizontal directivity pattern

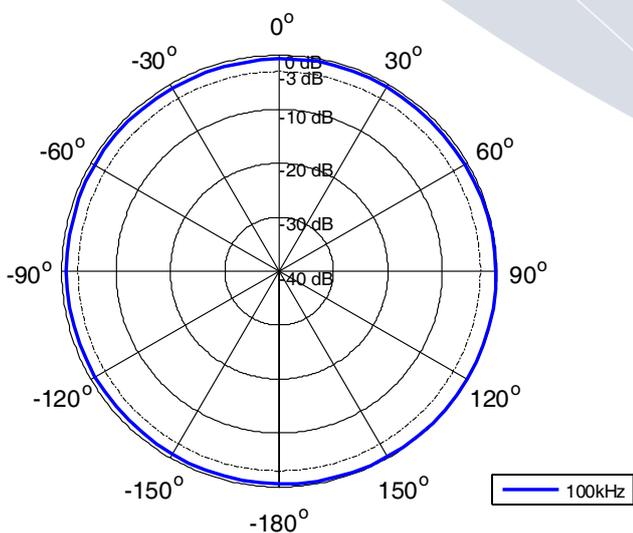


Receiving Sensitivity [dB re 1V/μPa @ 1m]

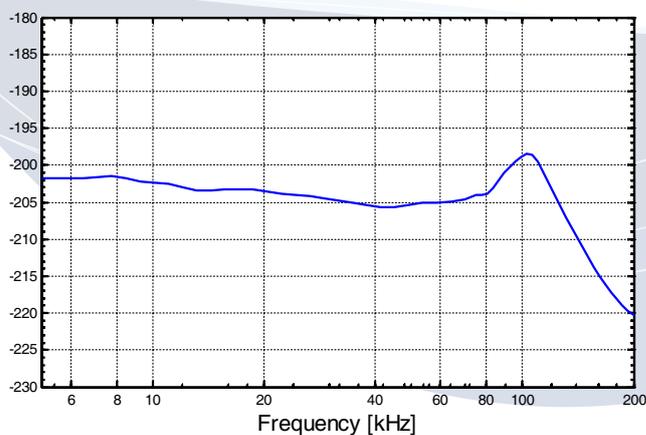

Transmitting Sensitivity [dB re 1μPa/V @ 1m]

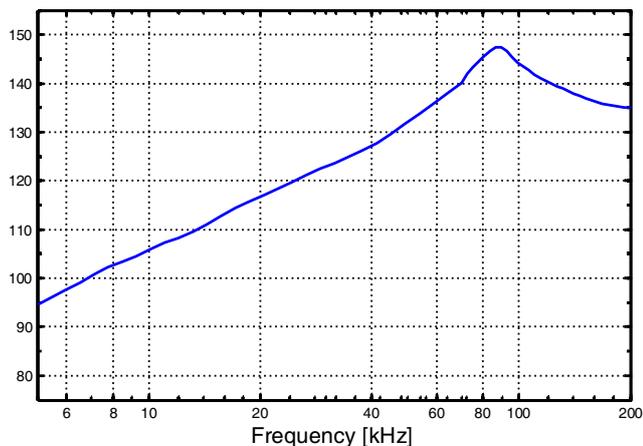

Impedance

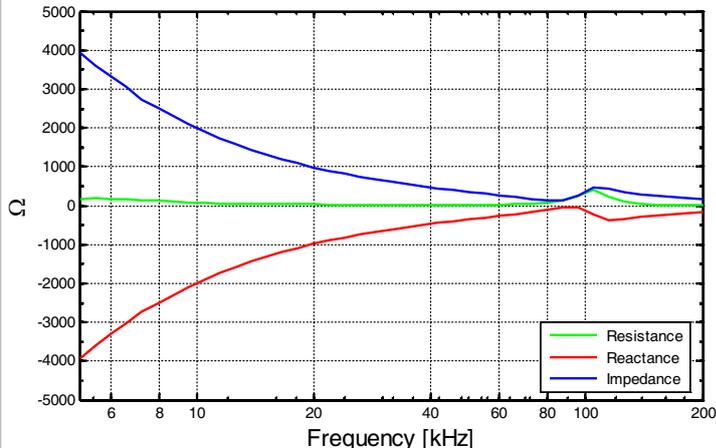

Hydrophone TC4033



Robust Spherical Reference Hydrophone



Documentation:

The sensor element is permanently encapsulated in special formulated NBR, which has been especially compounded to ensure acoustic impedance close to that of water and low water permeability.

Electrical Diagram and Outline Dimensions

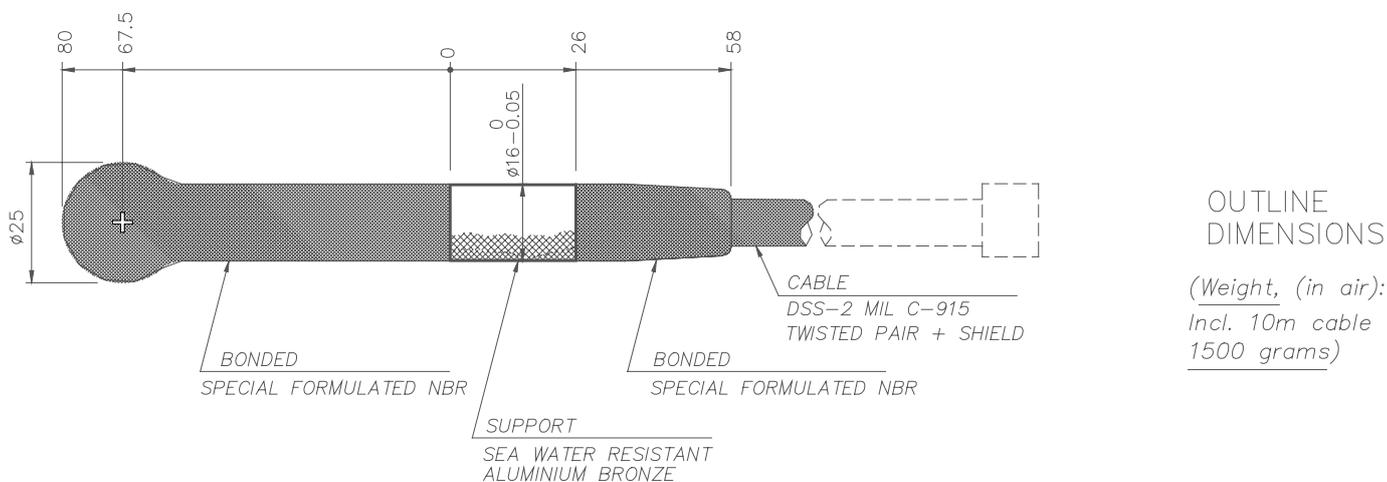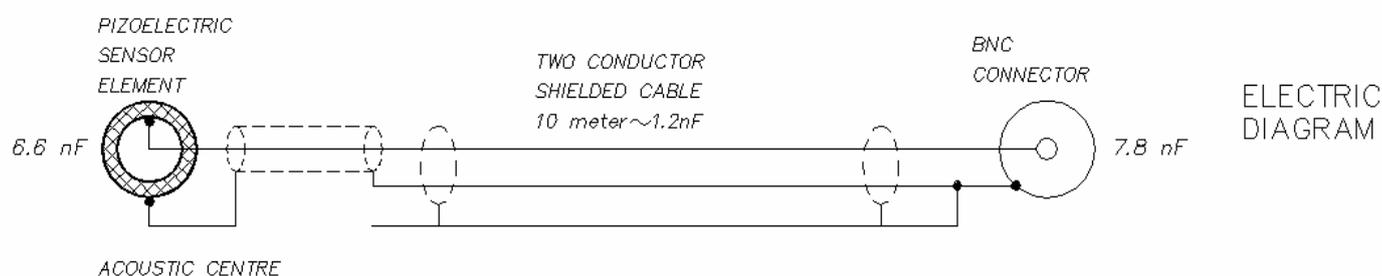

For information on export control regulations on this product, please refer to www.teledynemarine.com/reson



TELEDYNE MARINE
RESON
Everywhere you look™

www.teledynemarine.com/reson

Tel: +45 4738 0022 (Europe) • Tel: +1 805 964 6260 (USA)

Email: reson@teledyne.com